




Hygromatic II

PRODUCT OVERVIEW

GENERAL SPECIFICATIONS - Hygromatic II

| | | , 9. 0 | | | |
|-----------------------------|--------------------|--|--|--------------------------|--|
| CALIBRATION TO | TRANSFER STANDARD | No Charge | | | |
| (17025 TRACEABLE TO NIST) | CERTIFICATE | 17025 Validation (Additional Fees Apply) | | | |
| OPERATING AMBIENT CONDI- | TEMPERATURE | 18 °C to 28 °C | | | |
| TIONS | HUMIDITY | Up to 80 % RH | | | |
| STORAGE CONDITIONS | TEMPERATURE | -20 °C to 50 °C | | | |
| STORAGE CONDITIONS | HUMIDITY | 0 % to 95 % RH (non-condensing) | | | |
| ALTITUDE | 2000 m | | | | |
| CALIBRATION SYSTEM ACCURACY | TEMPERATURE | ± 0.10 °C Or Better Typically | ± 0.05 °C | *Based on Probe Accuracy | |
| | HUMIDITY | ± 1.00 % RH Or Better Specially | tuned systems can be as good as ± 0.60 % | *Based on Probe Accuracy | |
| | CONTROLLER TYPE | PID Controller | | | |
| UNIFORMITY | TEMPERATURE | 0.10 °C Or Better Typically : | : 0.05 °C | | |
| UNIFORMITY | HUMIDITY | 0.30 % RH @ 18 °C to 28 °C Or | Better Typically ± 0.25 % | | |
| STABILITY | TEMPERATURE | 0.05 °C | | | |
| | HUMIDITY | 0.15 % RH @ 18 °C to 28 °C | | | |
| WARM-UP PERIOD | AMBIENT CONDITIONS | 30 Minutes Maximum | | | |
| WARM-UP PERIOD | COLD | 30 Minutes | | | |
| RESOLUTION | | Temperature | 0.01 °C | | |
| | DISPLAY | Humidity | 0.01 % RH | | |
| | | Dew Point | 0.01 °C (Calculated) | | |
| | USB | Temperature | 0.01 °C | | |
| | | Humidity | 0.01 % RH | | |
| | | | | | |

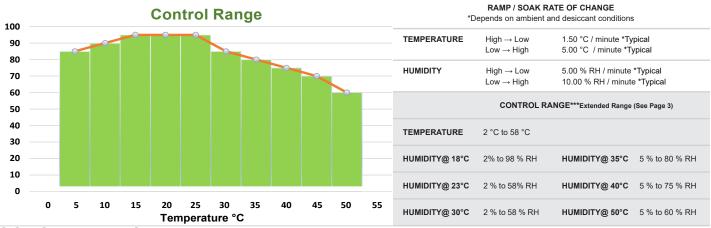

CONSUMABLES

| | RESERVOIR | 200 ml | |
|---------------|-----------------------|--|--|
| WATER | SPILL RESISTANT | Yes | |
| | REQUIRED FLUID | Distilled Water Only | |
| | EST. REFILL PERIOD | 15 Days to 1 Month (Typical) *Depends on Usage | |
| | FILL INDICATOR | Floating Ball | |
| | TYPE | Molecular Sieve | |
| | REPLACEMENT | When Indicating Desiccant is 3/4 Used | |
| DESICCANT | REPLACEMENT FREQUENCY | Depends Entirely on User Workload | |
| | LOCATION | Left Side Mounted | |
| | FASTENER | Desiccant Mounting Bracket Provided | |
| RECALIBRATION | FREQUENCY | Depends on User Uncertainty Requirements | |
| | | Once Per Year Recommended | |

^{**}Information subject to change, please visit our website for updates at www.geocalibration.com.

MECHANICAL

| GENERATOR DIMENSIONS | Measurement Type | Width | Depth | Height |
|--|-----------------------------|--|--------------------------------------|---|
| | Metric | 55.33 cm | 40.65 cm | 24.65 cm |
| | English | 21.78 in | 16.02 in | 9.70 in |
| CHAMBER DIMENSIONS | Measurement Type | Diameter | Depth | |
| | Metric | 14.50 cm | 20.00 cm | |
| | English | 5.71 in | 7.87 in | |
| | Measurement Type | Diameter | Depth | |
| WORKING DIMENSIONS AND VOLUME | Metric | 12.50 cm | 10.90 cm | |
| WORKING DIMENSIONS AND VOLUME | English | 4.92 in | 4.29 in | |
| | Volume | 1.5 Liter Effective Working Volume | | |
| | He to Oak | Metric | 15.5 kg | |
| WEIGHT | Linit Only | | | |
| WEIGHT | Unit Only | English | 34.0 lb | |
| POWER SUPPLY | Unit Only | English 12 Volt DC @ 1A | 34.0 lb | |
| | Unit Only Depends on doors | | | |
| POWER SUPPLY | · | 12 Volt DC @ 1A | | |
| POWER SUPPLY STANDARD PORT QUANTITY | Depends on doors | 12 Volt DC @ 1A Availability: 6 Ports, 5 | | Actual Unit Range |
| POWER SUPPLY STANDARD PORT QUANTITY CHILLED MIRROR PORTS | Depends on doors In and Out | 12 Volt DC @ 1A Availability: 6 Ports, 5 | Ports, 4 Ports, 2 Ports | Actual Unit Range + 5.00 to + 60.00 °C |
| POWER SUPPLY STANDARD PORT QUANTITY | Depends on doors | 12 Volt DC @ 1A Availability: 6 Ports, 5 Temperature | Ports, 4 Ports, 2 Ports Probe Range | <u> </u> |

*** Extended Ranges for Temperature and Humidity

Upon users request GEO is Offering the extended ranges for both Temperature and Humidity which are as following:

| EXTENDED CONTROL RANGE | | | |
|------------------------|---|----------------|--------------------------------------|
| TEMPERATURE | 2 °C to 58 °C (Normal is 5 °C to 55 °C) | HUMIDITY@ 35°C | 2 % to 80 % RH (Normal is 5% to 80%) |
| HUMIDITY@ 18°C | 2 % to 95 % RH (Normal is 5% to 95%) | HUMIDITY@ 40°C | 2 % to 75 % RH (Normal is 5% to 75%) |
| HUMIDITY@ 23°C | 2% to 98% RH(Normal is 5% to 95%) | HUMIDITY@ 50°C | 2 % to 60 % RH (Normal is 5% to 60%) |
| HUMIDITY@ 30°C | 2 % to 85 % RH (Normal is 5% to 85%) | | |

- 1.The Temperature ranges are not guaranteed if the environment Temperature is not controlled to 23 °C. User will see stable and extended results if environmental temperature is controlled at 23 °C or 72 °F. The normal temperature working ranges in Model 2000SP are 18 °C to 28 °C for different Humidity ranges. The Extended Ranges can help the user to test Hygrometers for lower or higher temperature values, although for Rh it may not be a great use at the extended temperature ranges.
- 2.The Humidity ranges are affected by the temperature especially for the high humidity above 70%. On high humidity if the temperature drops, it can go to Dew Point and can form the Condensation. To prevent condensation, user must bring the temperature to desired value first and then bring the Humidity to desired value. The extended Rh ranges are offered for the Hygrometers that needed to be calibrated below 5% or above 95%. It will not get the best calibration tolerances because the probe goes out of linear range.

Note: To go to the lower Rh, such as 2%, user must make sure the Desiccant is reasonably good. For high Rh, such as 98%, user have to use the insulated door only.

3.The following table shows the order how user should set the set points to get the best results without getting the Dew Point condition or Condensation, avoiding the unnecessary use of Desiccant and make the system more efficient.


Table Temperature vs Humidity relationship and how to get the best result:

| Temperature | Humidity |
|-------------|---|
| NO Change | Set Rh Hi/LO within Specification Range |
| Low to High | Set Rh Hi/LO within Specification Range |
| High to Low | If Rh is Higher than 70%, Set Rh to 70% first. Set the temperature to desired value and then Set Rh to desired value within Specification Range |

^{*} Complete Accessory List is Available at www.geocalibration.com

^{**}Information subject to change, please visit our website for updates at www.geocalibration.com.





Email: Sales@GeoCalibration.com **Website:** www.GeoCalibration.com